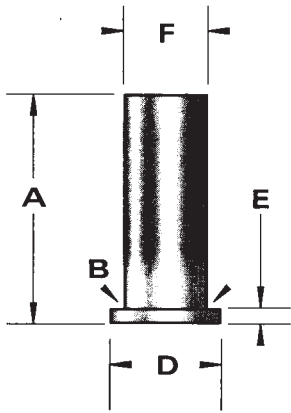
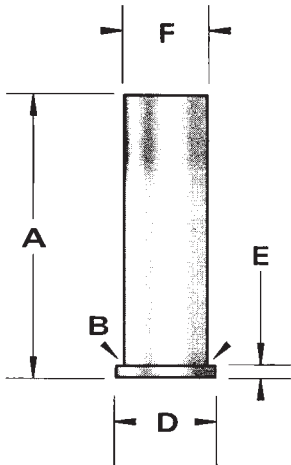


CARTRIDGE: 11,5 x 57R Spanish Reformado			
OTHER NAMES:		DIA: .454 BALLISTEK NO: 454H NAI NO: RMS 21115/4.304	
DATA SOURCE: COTW 4th Pg216			
HISTORICAL DATA: Early Spanish mil. ctg. ca. 1867.			
NOTES:			
LOADING DATA:			
BULLET WT./TYPE 250/Lead	POWDER WT./TYPE 32.0/4198	VELOCITY ("/SEC) 1220	SOURCE Barnes
CASE PREPARATION: SHELLHOLDER (RCBS): Spl.			
MAKE FROM: .43 Span. Rem. (BELL). Trim case to length. F/L size. Case will fireform in the chamber.			
PHYSICAL DATA (INCHES):		DIMENSIONAL DRAWING:	
CASE TYPE: Rimmed Straight CASE LENGTH A = 2.26 HEAD DIAMETER B = .525 RIM DIAMETER D = .630 NECK DIAMETER F = .486 NECK LENGTH H = N/A SHOULDER LENGTH K = N/A BODY ANGLE (DEG'S/SIDE): .512 CASE CAPACITY CC'S = 5.26 LOADED LENGTH: 3.06 BELT DIAMETER C = N/A RIM THICKNESS E = .08 SHOULDER DIAMETER G = N/A LENGTH TO SHOULDER J = N/A SHOULDER ANGLE (DEG'S/SIDE): N/A PRIMER: L/R CASE CAPACITY (GR'S WATER): 81.30		 <p>-NOT ACTUAL SIZE- -DO NOT SCALE-</p>	

CARTRIDGE: 11,7 x 41.5R Danish Remington			
OTHER NAMES:		DIA: .465 BALLISTEK NO: 465A NAI NO: RMS 21115/3.183	
DATA SOURCE: Hoyem Vol.2 Pg233			
HISTORICAL DATA: Danish mil. ctg. about 1875.			
NOTES:			
LOADING DATA:			
BULLET WT./TYPE 250/Lead	POWDER WT./TYPE 19.3/IMR4227	VELOCITY ("/SEC) —	SOURCE JJD
CASE PREPARATION: SHELLHOLDER (RCBS): Spl.			
MAKE FROM: .375 Flanged (BELL). Cut case to 1.7". F/L size, trim to length & chamfer.			
PHYSICAL DATA (INCHES):		DIMENSIONAL DRAWING:	
CASE TYPE: Rimmed Straight CASE LENGTH A = 1.63 HEAD DIAMETER B = .512 RIM DIAMETER D = .574 NECK DIAMETER F = .483 NECK LENGTH H = N/A SHOULDER LENGTH K = N/A BODY ANGLE (DEG'S/SIDE): .531 CASE CAPACITY CC'S = 3.77 LOADED LENGTH: 2.32 BELT DIAMETER C = N/A RIM THICKNESS E = .066 SHOULDER DIAMETER G = N/A LENGTH TO SHOULDER J = N/A SHOULDER ANGLE (DEG'S/SIDE): N/A PRIMER: L/R CASE CAPACITY (GR'S WATER): 58.29		 <p>-NOT ACTUAL SIZE- -DO NOT SCALE-</p>	