


45 Colt V&P Test Barrel

Issued: 02/12/1987

VENTED & SOLID

Revised: 08/10/2015

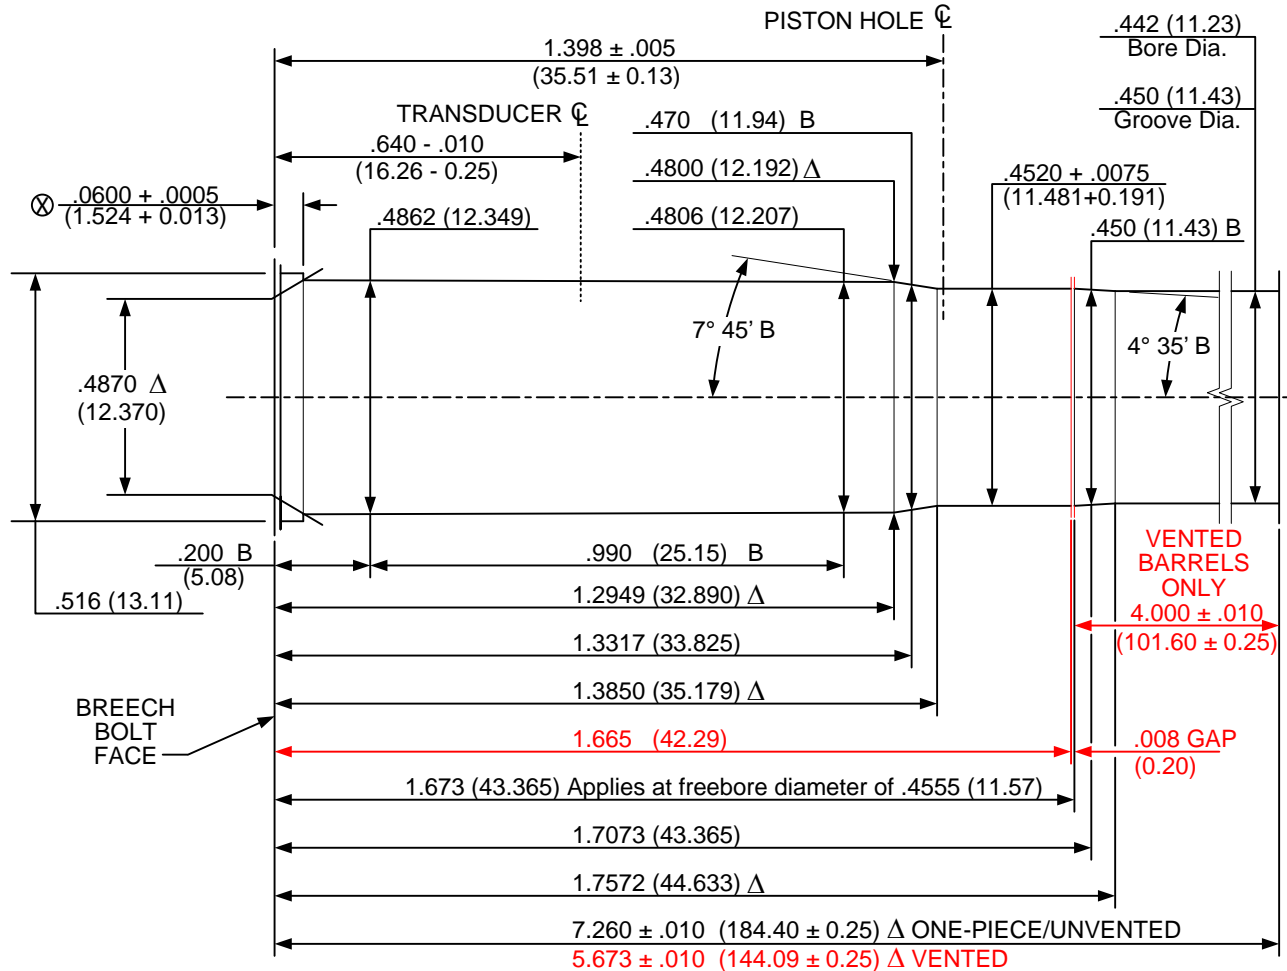

DO NOT SCALE FROM DRAWING

NUMBER OF GROOVES: 6
 WIDTH OF GROOVES: .156 \pm .002 (3.96 \pm 0.05)
 TWIST RATE: 16.00 (406.4) L.H.
 DIAMETER OF PISTON HOLE: .206 (5.23)
 TRANSUDER DIAMETER: .250 (6.35)

LAND AND GROOVE DIMENSIONS TO BE
 WITHIN TOLERANCES THROUGHOUT
 LENGTH OF BARREL.

UNLESS OTHERWISE NOTED,
 ALL DIAMETERS \pm .0005 (0.013)
 LENGTH TOLERANCE \pm .005 (0.13)

NOTE:

B = BASIC Δ = REFERENCE DIMENSION \varnothing = HEADSPACE DIMENSION
 * DIMENSIONS ARE TO INTERSECTIONS OF LINES (XX.XX) = MILLIMETERS
 ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)