



**1. S.A. CATTLEMAN II REVOLVER**  
**RETRACTING FIRING PIN**  
**Patent N°: US 9,273,919 B2**




**A**

- Position of hammer during transport.
- Hammer fully lowered.
- The firing pin floats free in its guide, exerting no pressure towards the chamber.
- Transfer bar disengaged

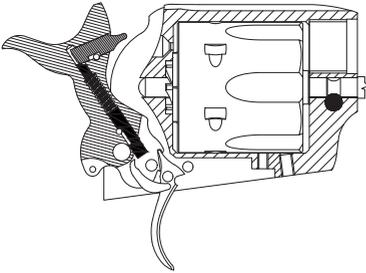


**B**

- Half cock position for loading and unloading.
- Trigger not released.
- Transfer bar disengaged.

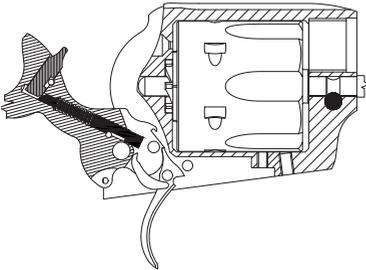

**C**


- With the hammer at full cock, the hand shifts into position to engage the firing pin once the trigger is pulled.



**D**


- When the trigger is pulled from a fully cocked position, the hand engages the firing pin, locking it in the forward position until the trigger is released.

## **2. S.A. CATTLEMAN REVOLVER** **WITH HAMMER SAFETY BAR**




**A**

- Quarter cock position (safe) during transport.




**B**

- Half cock position for loading and unloading.



**C**

- Full cock firing position.



**D**

- Position after firing.